

AGS-910

1U Rackmount Xeon E5-2600 / 2600 v2 GPU server, Supporting 3 x PCIe x16 double-depth card and 1 x PCIe x8 single-depth FH/HL card



Features


- Processor: Dual Intel Xeon E5-2600 / 2600 v2 series, up to 20 cores / 40 threads
- Memory : DDR3-1333/1600 MHz Non-ECC/ECC/REG type up to 128GB
- Remote Management: IPMI function support
- Expansion: Supporting 3 * PCIe x16 double-deck card + 1* PCIe x8 single-deck FH/HL card
- PSU: 1100W 1+1 redundant power supply with 80 PLUS Platinum level certification

Specifications

Processor System	Chipset	Intel C602J Chipset	
	CPU	Dual Intel LGA2011 Xeon 2600 / 2600 v2 processor (up to 135W TDP)	
	L2 Cache	Up to 30 MB	
	Memory	8 x DDR3 1333/1600 Non-ECC/ECC/REG DIMM, maximum to 128GB	
Graphics	Controller	Aspeed AST2300	
	VRAM	64 MB	
Expansion Slot	Slot location 1 (Upper Middle slot)	PCIe x 8 slot (Gen3 x8 link) for FH/HL expansion cards	
	Slot location 2 (Lower Right slot)	PCIe x16 slot (Gen3 x16 link), for double-deck 4.376"(H)/10.5"(L) expansion cards	
	Slot location 3 (Upper Left slot)	PCIe x16 slot (Gen3 x16 link), for double-deck 4.376"(H)/10.5"(L) expansion cards	
	Slot location 4	-	
	Slot location 5	-	
	Slot location 6 (Lower Left slot)	PCIe x16 slot (Gen3 x16 link), for double-deck 4.376"(H)/10.5"(L) expansion cards	
Drive Bay	2.5" (Hot-swap)	4	
	3.5" (Front Accessible)	-	
	3.5" Internal	-	
Ethernet	Interface	4 x 10/100/1000 Mbps Gigabit Ethernet	
	Controller	1 x Intel 82579LM + 3 x Intel I210AT	
Front I/O Interface	USB	2 x USB2.0	
Rear I/O Interface	USB	2 x USB2.0	
	PS/2	-	
	COM	-	
	Display	1 x VGA	
	RJ-45	4 (1 is sharing NIC for IPMI)	
Internal connector	Type-A USB	1	
	COM	2	
	LPC	1	
Watchdog Timer	Output	Interrupt, system reset	
	Interval	Programmable, 1~255 sec	
Power Supply	Power Output Wattage	80 PLUS Platinum 1+1 redundant Power Supply	
		900W @ 100 ~ 120V 1100W @ 200 ~ 240V	
	Input Range	AC 100 ~ 240 V	
Cooling	Chassis Fan	7 x 40x56 + 2 x 40x28 high speed fan	
	Air Filter	-	
Miscellaneous	LED Indicators	Power status, HDD activity, Lan status, location, error message	
	Remote Management	Advantech Remote Monitoring Utility	
Environment	Operating Temperature	0 ~ 40° C (32~104° F)	Non-Operating -20 ~ 60° C (-4 ~ 140° F)
	Humidity	10 ~ 85% @ 40° C	10 ~ 95% @ 40° C
	Vibration (5 ~ 500 Hz)	0.5 Grms	2 Grms
	Shock	10G (with 11ms duration, half sine wave)	30G
	Physical Characteristics	Dimension (D x W x H)	770 x 430 x 44 mm

Dimensions

Unit: mm [inch]

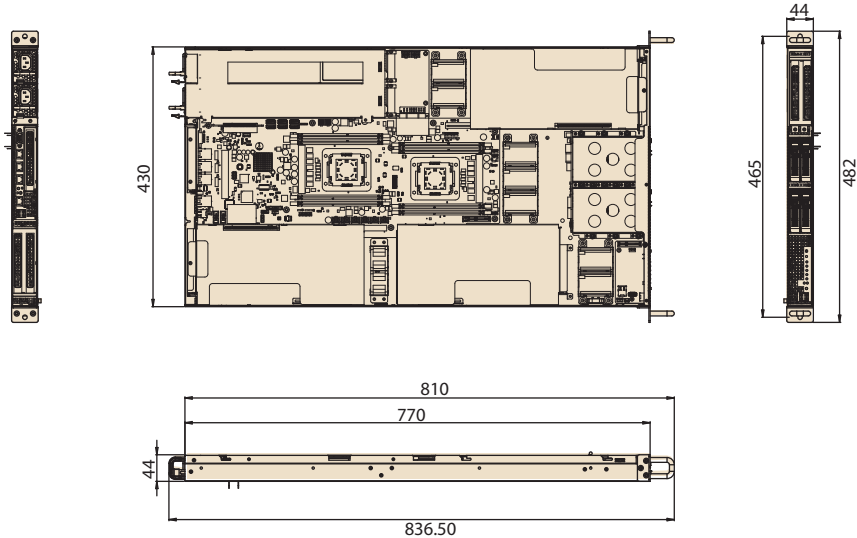

Ordering Information

Part Number	HDD	VGA Chip	RJ45	IPMI	Power supply
AGS-910I-R11A1E	4	AST 2300	4	YES	1+1 1100W RPS

System Contents

Items	Advantech P/N	Quantity
CPU0 heatsink	1960065593N001	1
CPU1 heatsink	1960065591N001	1
Slide rail kit	9680015703	1
Power cable for expansion card (Pre-assembled in the system)	1700023022-01	6
Driver CD	2061910I00	1
Startup manual	2001910I10	1


Front View



Rear View



Back View

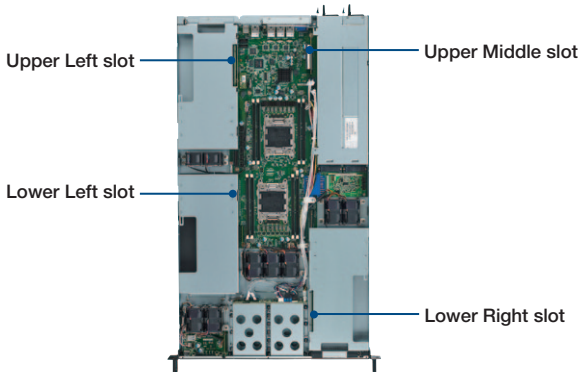

Tel. (514) 832-0808
 Toll Free: 1 (866) 590-4288
www.ibt.com