



# IBT CMI203 - Products Briefs

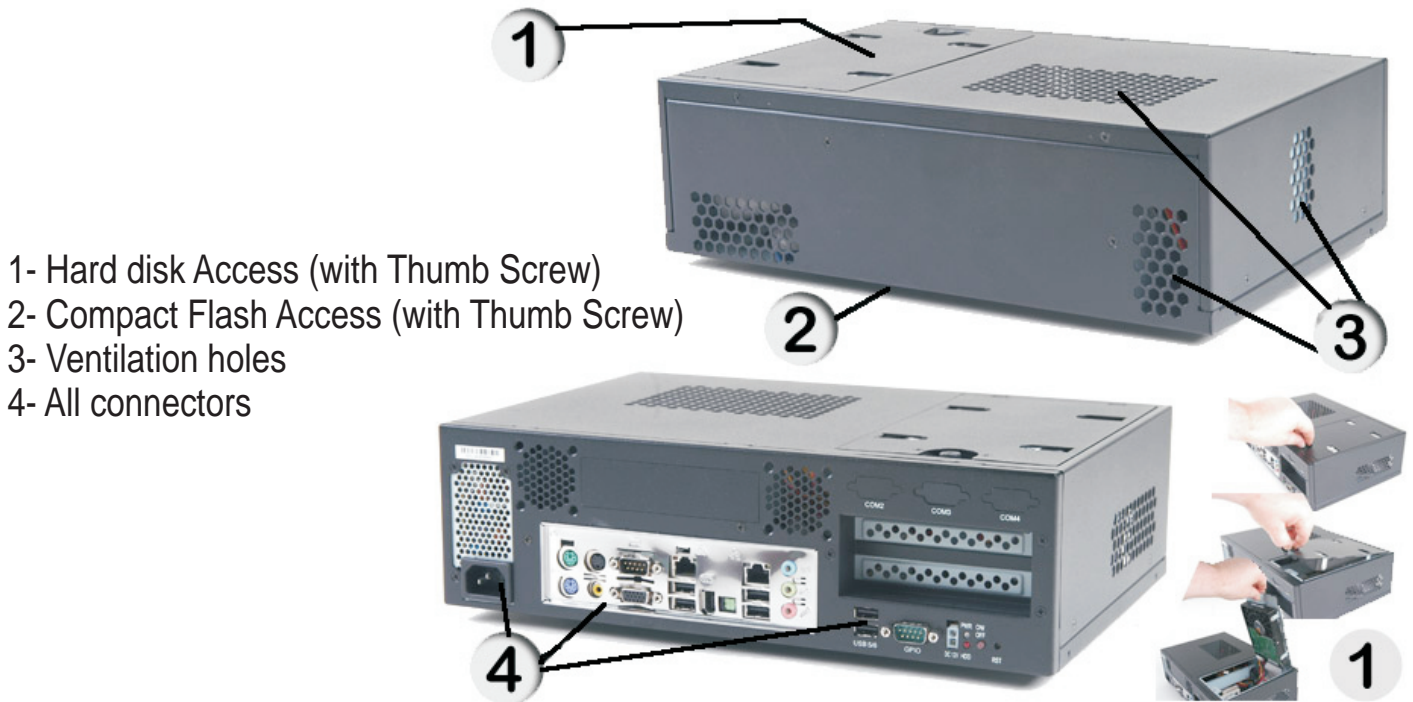

- 1- Hard disk Access (with Thumb Screw)
- 2- Compact Flash Access (with Thumb Screw)
- 3- Ventilation holes
- 4- All connectors

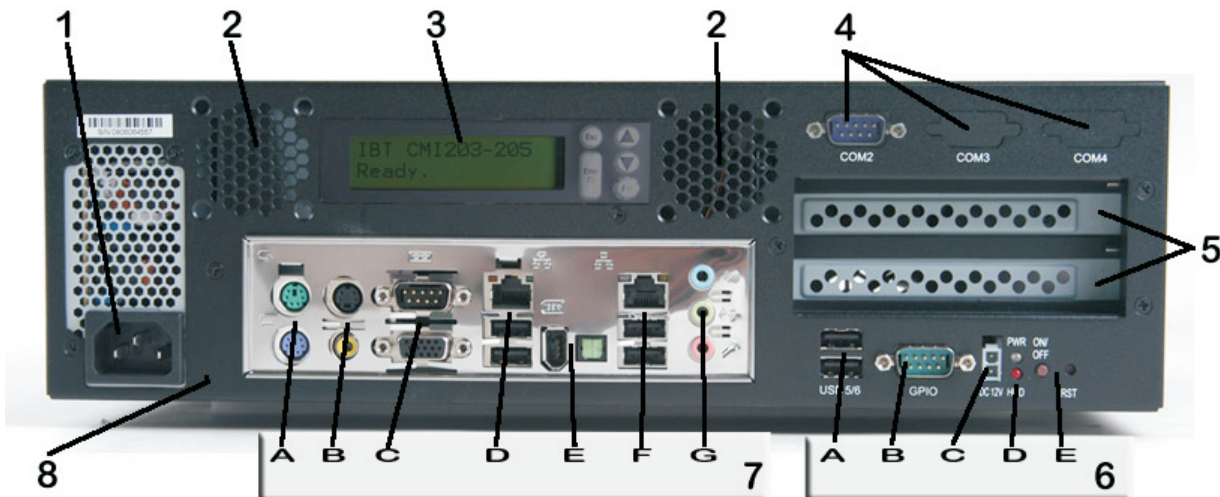

- 1 - 250W Power Supply (Input Voltage:90~264VAC full range)
- 2 - (Optionnal) 40 mm Fan (x2)
- 3 - (optionnal) LCM Module 16x2 with 3 button HotKey Function
- 4 - (Optionnal) three DB9 for Serial (or Secondary VGA with ID390C)
- 5 - Two PCI slots (8" length)
- 6 - GPIO (ID721) General Control and Input/Output (Note 1)
- 7 - Flexible IBT Mini-ITX MB899F Motherboard's I/O shields (note 2)
- 8 - SECC Contruction  
340(W) x 100(H) x225(D)mm (13.39" x 3.94" x 8.89" )  
Desktop or Wall mount mounting

Note 1; (ID721) GPIO  
 A: 2x USB ports,  
 B: GPIO , 12v & 5v  
 C: 2x 12V DC output connector,  
 D: Standby LED, Power LED,  
 E: ATX power On/Off/Rese

Note 2; (MB899F) Motherboard  
 A: Keyboard/Mouse PS2,  
 B: SVIDEO/COMPOSITE output,  
 C: Serial DB9M/VGA DB15F,  
 D: Intel 10~100 LAN/USB 2.0,  
 E: Firewire/SPIF Digital,  
 F: Marvell 10~1000 LAN/USB 2.0,  
 G: Audio MIC/Out/IN